



Intumescent Paints for Walls and Ceilings

IWC intumescent paint

IWC intumescent paint is an intumescent coating for walls and ceilings. Inherently non-combustible surfaces such as plasterboard and brick can become a potential fire hazard due to repeated redecoration with conventional paints.

Different paint types from a variety of manufacturers have generally been used over many years with less than thorough preparation. In a fire thick layers of old paint tend to de-laminate rapidly catching and spreading fire around a building. In extreme cases a lethal "flash-over" fireball effect is created.

The resultant risk to life and property can be greatly reduced at minimum cost using a combination of **IWC intumescent paint**, an insulating "intumescent" barrier coating and **SFR wallcoat**.

The **IWC intumescent paint** system can help landlords comply with the Fire Safety Order 2005. Ask us for details.

- 1 coat **IWC intumescent paint** for walls and ceilings
- Use with **SFR wallcoat**
- For wallpaper & multi-layer painted surfaces
- Matt and eggshell
- Class 0 + Bs1 d0 with 1 coat of **SFR wallcoat** (smoke & flame retardant)
- White + BS & RAL colours
- Intumescent basecoat for 30/60/90/120 minutes protection on plasterboard, cementitious board and concrete
- Undercoat shades
- Use with 1 coat of **SFR wallcoat** to seal

Available in

25 and 100 square metre for Class O and B s1 d0 for walls and ceilings

25 and 80 square metre for Class O and B s1 d0 for wallpaper
5 kg for 30 + 60 mins


Durable flamespread and smoke protection

Wallcoat expands to create an insulating barrier. **SFR wallcoat** emits a safe firedamping vapour to control flamespread. Together they upgrade potentially dangerous 'multi-layer' previously painted walls & ceilings. High quality, wear, wash moderate-scrub resistant decorative finish.

Intumescent and flame retardant fire protection

When exposed to a fire **IWC intumescent paint** releases a flame extinguishing gas which instantly protects the surface.

Simultaneously heat activates **IWC intumescent paint** underneath causing it to expand and create a fire protective barrier, insulating old paint films from heat and oxygen.

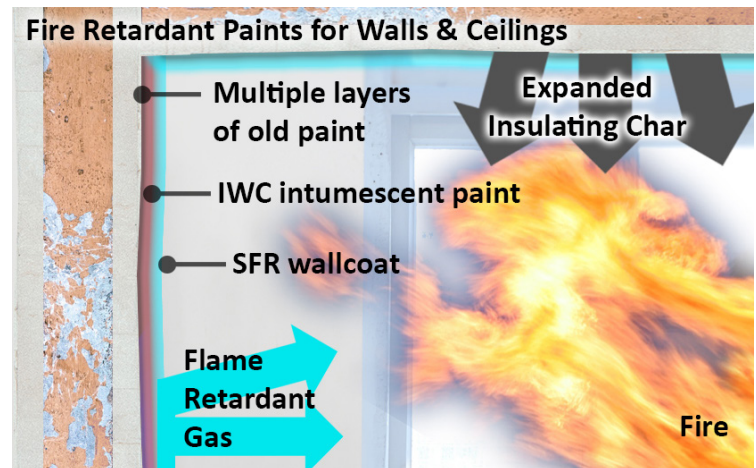

Finish and colour range

IWC intumescent paint is overcoated with the following decorative finishes:

- Finish with **SFR wallcoat**
- BS4800 and RAL colours
- Matt or Eggshell
- To view the colour chart go to <http://intumescent-paints.co.uk/paint-colour-charts.html>

Preparation

Surfaces should be sound and firmly adhering, clean, dry and free of surface contamination. Remove loose, flaking or suspect paint film and adequately abrade existing smooth or hard coatings. Apply by brush, dense short-pile roller or spray. Maintain wet edge during application.

Specification

Achieve BS EN Class B s1 d0 with

- 1 coat **IWC intumescent paint**
- 1 coat **SFR wallcoat**

Application conditions

Min. 5°C, Max RH 75%. surface 3+°C above dew point.
Avoid condensation.



Intumescent Paints for Walls and Ceilings

Fire testing

Tested at UKAS Fire Test Laboratory -

- Achieved BS EN Class B s1 d0
- Certified to EN 13501

on Multilayer painted, high-risk Class 4 surfaces

New eu/ bs en fire standard Explained

- BS EN Class B replaces Class O
- Today both Class O and Class B comply for escape routes, but Class O is being phased out
- Safe, compliant BS EN standards for smoke & toxic gasses are s1 & s2
- Safe, compliant BS EN standard for flaming droplets is d0
- New compliant standards for escape routes, corridors, stairs, lobbies etc are BS EN Class B s1 d0 and Class B s2 d0

Quality assurance

Both products are manufactured under ISO 9001.

Technical advice

T: [01329 841 416](tel:01329841416) or E: sales@stormflame.com

Disclaimer

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as Intumescent-Paints.co.uk (part of the Stormflame Group) has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. Intumescent-Paints.co.uk (part of the Stormflame Group), disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 841 416 or email sales@stormflame.com and we will contact you.

For certification and compliance with regulations we will supply a FREE of charge Certificate of Supply with each order or project.